

## Switch Between Any Two HDMI™ Sources and Output to Four Displays



**MODEL#: HDMI-SW-2X4M**

### Switch Between Any Two HDMI Sources and Output to Four Displays

The Linear 2x4 Switcher/Splitter for HDMI is equipped with two HDMI inputs and four HDMI outputs. Two inputs accommodate the simultaneous connection of up to two high definition video sources. It supports HDMI compatible equipment such as HD cable and HD satellite set top boxes, HD DVRs, HD-DVD players, Blu-ray Disc players, and other sources with an HDMI output. Four outputs send the high definition audio/video signals up to four high definition displays. Switching is done via the IR remote that is provided with the unit.

### How It Works

You simply connect all your sources to the switcher's HDMI inputs. Then connect up to four displays to the switcher's HDMI outputs. Once the sources, the switcher, and the display(s) are powered and connected, you simply select which source you want to view using the IR remote.

### Features

- Switch easily between any two HDMI sources
- Outputs are mirrored to four HDMI displays simultaneously
- Extends the range of the HDMI compliant device by equalizing and reclocking the HDMI signal
- Supports resolutions up to 1080p, 2K and 1920 x 1200
- HDMI / HDCP compliant

### Specifications

- Video Amplifier Bandwidth: 165 MHz
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- Single Link Range: 1080p/1920 x 1200
- HDMI Connector: Type A 19 pin female
- Includes: Power Supply: 5V DC (Regulatory Approvals Include UL and CE), RMT-2IR remote control and two 6 ft Mono-Lok HDMI cables
- Power Consumption: 10 Watts (max)
- Dimensions: 12" W x 1.25" H x 4.25" D
- Shipping Weight: 4 lbs.


**1080P**  
PROGRESSIVE

**HDMI**  
HIGH-DEFINITION MULTIMEDIA INTERFACE

**HDTV**

**HD DVD**

**Blu-ray Disc™**

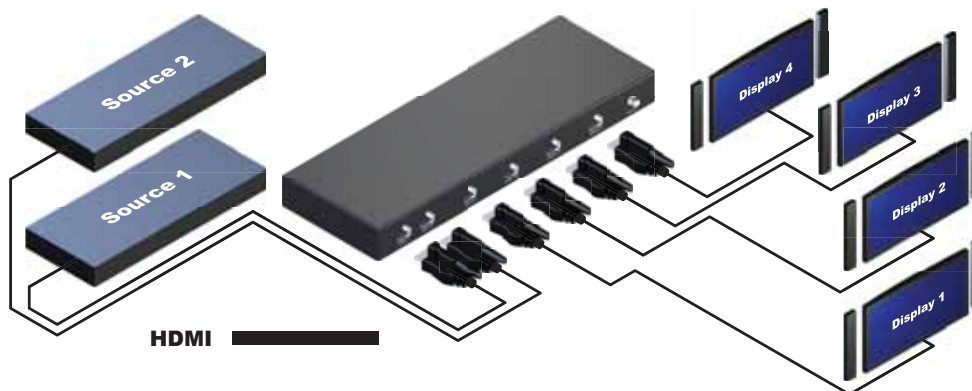

**Linear®**  
Building On Innovation.

(760) 438-7000

USA & Canada (800) 421-1587 & (800) 392-0123

Toll Free FAX (800) 468-1340

www.linearcorp.com

